



All of C3 Lighting's Touchpad Switches use capacitive-sense technology. Styles available for specific lighting applications in addition to custom programming. Outputs both DMX 512 and 0-10 VDC commands. Interfaces directly with C3's Remote Power Distribution modules via CAT5e cable or virtually any DMX 512 or 0-10 VDC controllable device.

Available for: (find your application below)

POWER + CONTROL



FEATURES

- DMX 512 output.
- Status indicator LEDs.
- Daisy chain connection of multiple Touchpads.
- Connection method: RJ45 cable by others.
- Rear mounted electronics.
- Two 0-10VDC analog dimming outputs.
- Retains program memory after power loss.
- Operating temperature -25C to +80C.
- No electrolytic capacitors.
- Single or multi-gang J-box mounting with factory Decora-style face plate.
- Input Voltage 12-48VDC.
- 10 position Phoenix Connector available for special applications.
- Requires custom Decora-style face plate provided - white only.

POWER + CONTROL

CONTINUE FOR FULL LIST OF CONTROLS



ORDERING INFORMATION



One Zone:

Controls dimming for a single zone of lighting using capacitive-sense slider, with Master On-Off. DMX and 0-10 VDC output.

Product #

DMX-1 (DMX Output)

010V-1 (0-10V Output)



Two Zone:

Controls dimming of two zones of lighting using capacitive-sense slider, with Master On-Off. DMX and 0-10 VDC output.

Product #

DMX-2 (DMX Output)

010V-2 (0-10V Output)



Three Zone:

Controls dimming of three zones of lighting using capacitive-sense slider, with Master On-Off. DMX output.

Product #

DMX-3



ORDERING INFORMATION



Four Zone:

Controls dimming of four zones of lighting using capacitive-sense slider, with Master On-Off. DMX output.

Product #
DMX-4



5-Step Dimming:

Provides five different preset levels of intensity for a single zone of lighting, with Master On-Off. DMX output.

Product #
DMX-P5




DMX Scenes:

Controls start of five different DMX scenes, with Master On-Off.

Product #
DMX-5S



ORDERING INFORMATION

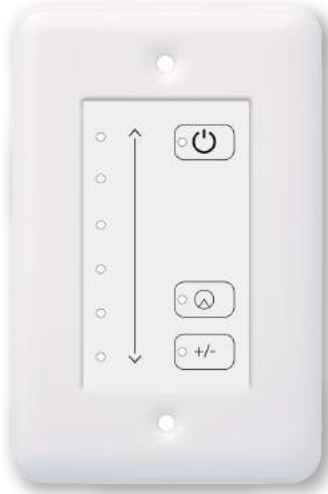

Tunable-White:

Controls both color temperature and dimming of C3 Lighting's Tunable-White Fixtures using capacitive-sense slider, with Master On-Off. DMX output.


Product #
DMX-TW



Surgical External Field/Exam:

Provides five different color temperatures of light output for C3 Lighting's External Field Illuminator or Exam Light, with Master On-Off. DMX output.

Product #
DMX-SEFIEP

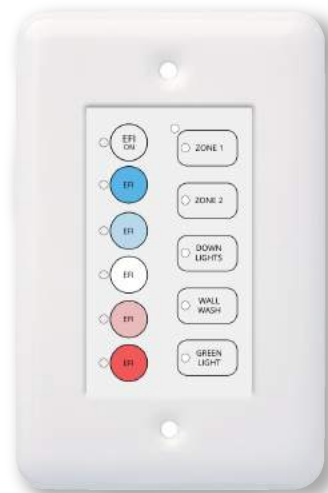


Surgical:

Provides on/off control of five zones of lighting in an operating room in addition to five different color temperatures of light output for C3 Lighting's External Field Illuminator. DMX output.

Product #
DMX-SP



ORDERING INFORMATION

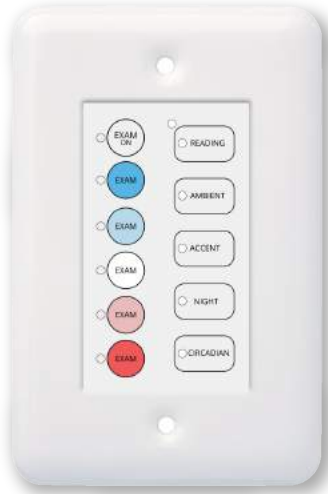


Patient Room:

Provides on/off control of four zones of lighting, plus Circadian Illumination option in a patient room in addition to five different color temperatures of light output for C3 Lighting's Exam Light. DMX output.

Product #

DMX-PRC

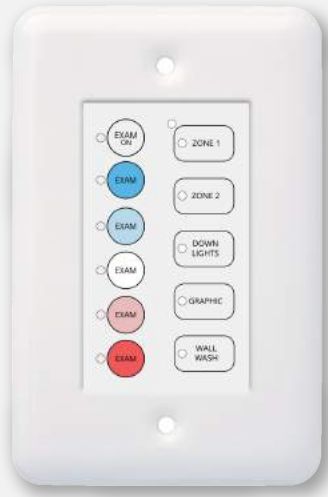

MRI:

Provides on/off control of five zones of lighting in an MRI room in addition to five different color temperatures of light output for C3 Lighting's Exam Light. DMX output.

Product #

DMX-MRIP



NICU:

Provides on/off control of four zones of lighting, plus Circadian Illumination option in an NICU in addition to five different color temperatures of light output for C3 Lighting's Exam Light. DMX output.

Product #

DMX-NICUP



ORDERING INFORMATION



Classroom:

Five custom preset color and intensity for C3 Lighting's fixtures, designed to complement classroom activities: Energy, Study, Standard, Relax, AV, with Master On-Off. DMX output.

Product #

DMX-CP

ACCESSORIES

SINGLE-GANG FACEPLATE

DMX-SGFP

DUAL-GANG FACEPLATE

DMX-DGFP

